




# ACM-1011

Indoor IP IR Bullet Camera




\* The bracket needs to be purchased separately.

- 1/3" Micron Progressive Scan CMOS
- Day and night function with Mechanical IR Cut Filter
- Integrated f3.3 ~ 12 mm / F1.6 lens
- Selectable MPEG-4 / MJPEG compression
- VGA resolution at 30 FPS
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported
- Hardware motion detection
- DC 12V or Power over Ethernet (IEEE 802.3af) supported

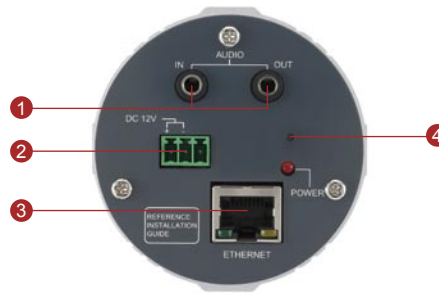

- ① Audio Input / Output
- ② DC 12V Power Input
- ③ Ethernet Port
- ④ Reset Button

## DIMENSION DIAGRAM

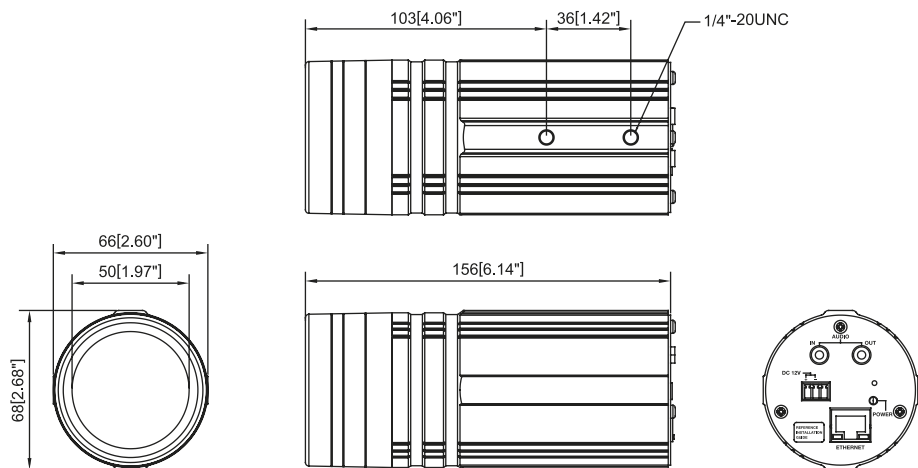

Unit: mm [inch]



## PRODUCT SPECIFICATION

		ACM-1011
Image	Device	Micron Progressive Scan CMOS
	Size	1/3 inch
	Effective Pixels	640(H) x 480(V)
Min. Scene Illumination	Color	Color mode automatically switched to B/W mode under 4 Lux
	B/W	0 Lux (IR LED ON)
	IR Sensitivity	from 700 nm to 1100 nm
	IR LED	IR LED x24 (850 nm)
	CDS Sensor	Yes
Lens	IR Working Distance	20 ~ 30 M (30 IRE)
	Lens	f3.3 ~ 12 mm / F1.6
Synchronization	Viewing Angle	89.8° ~ 23.9° (Horizontal)
	Sync. System	Internal
Day/Night Functions	Mechanical IR Cut Filter	Yes
	Functions	Motion Detection
Electronic Shutter		1/5 ~ 1/15,000 sec
Fixed Shutter (Manual)		1/30 ~ 1/1,000 sec. (60Hz); 1/25 ~ 1/1,000 sec. (50Hz)
Flickerless		1/120 sec. (60 Hz); 1/100 sec. (50 Hz)
BLC		Yes
AGC		Automatic (user defined)
White Balance		AUTO, INDOOR1, INDOOR2, OUTDOOR1, OUTDOOR2, HOLD CURRENT, MANUAL
S/N Ratio	S/N Ratio	Better than 44 dB
	Compression	MPEG-4 SP, MJPEG selectable
Video Compression	Picture Resolution	VGA (640x480)
		QVGA(320x240)
		QQVGA(160x112)
	Bit Rate	28 K ~ 3 M bps
Audio Input	Image Frame Rate	30 fps at VGA resolution
	Compression	8kHz, Mono, PCM
Audio Output	Audio Line Input	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
	Compression	8kHz, Mono, PCM
External I/O	Audio Line Output	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
	Reset Button	Factory default
Network	LED	System status
	Ethernet	Ethernet(10/100 Base-T), RJ-45 connector
	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP
Software	Web Browser	Microsoft Internet Explorer 6.0 or above
	SDK	ACTi SDK-10000
Operating	Security	Password protection: configured by the administrator
	Temperature	0 °C ~ 50 °C (32 ~ 122 °F)
Power	Power Requirement	PoE(IEEE802.3af) with class 3
	Power Consumption	6 W (DC 12V) w/ IR ON 6.24 W (PoE) w/ IR ON
Physical	Dimensions (ØxL)	68 mm x 156 mm (2.68" x 6.14")
	Weight	505 g (1.11 lb)
Approvals	Certificate	CE, FCC

## ACCESSORY OPTIONS

- Camera bracket PMAX-1100-000R0
- Camera bracket PMAX-1102-000R0



PMAX-1100-000R0



PMAX-1102-000R0