




1U Rackmount 8-channel  
Video Server with Two Way Audio


# ACD-2300



- Selectable MPEG-4/MJPEG compression
- CIF up to Full D1 resolution at 30/25 FPS (per channel)
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported (per channel)
- Hardware motion detection, Digital Input / Output (per channel)
- Serial ports for each channel

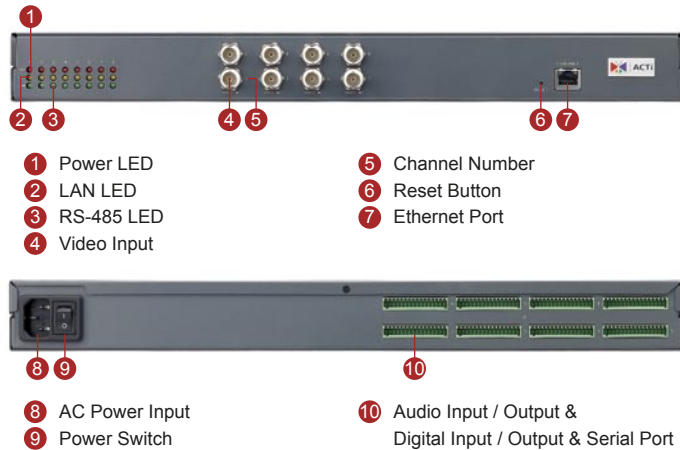

## DIMENSION DIAGRAM

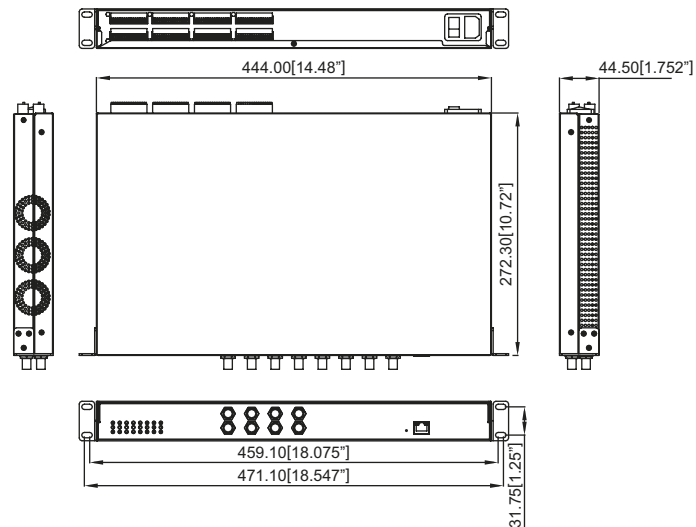

Unit: mm [inch]

**PRODUCT SPECIFICATION****Video Compression**

Compression	MPEG-4 SP, MJPEG selectable
Picture Resolution	Full D1 (720 x 480 in NTSC, 720x576 in PAL) VGA (640 x 480 in NTSC, 640x480 in PAL) CIF (352 x 240 in NTSC, 352x288 in PAL) QCIF (160 x 112 in NTSC, 176x144 in PAL) (per channel)
Bit Rate	28 K ~ 3 M bps (per channel)
Image Frame Rate	30fps at full D1 resolution (NTSC) 25fps at full D1 resolution (PAL)
Multi-stream	Up to 2 configurable frame rate/bit rate streams for preview and recording (per channel)

**Video Input**

Composite Input	8, CVBS, 1.0Vp-p with 75Ω loading, BNC connector
-----------------	--

**Video Output**

Composite Output	N/A
------------------	-----

**Audio Input**

Compression	8kHz, Mono, PCM
Audio Line Input	8, Unbalanced, 1.4Vp-p, 1Vrms, terminal block

**Audio Output**

Compression	8kHz, Mono, PCM
Audio Line Output	8, Unbalanced, 1.4Vp-p, 1Vrms, terminal block

**Alarm**

Digital Input	2, TTL, terminal block (per channel)
Digital Output	2, TTL, terminal block (per channel)

**Remote Control**

Serial Port	RS-485: Half Duplex, terminal block RS-422: Full Duplex, terminal block RS-232**: Full Duplex, terminal block (per channel)
-------------	--

**External I/O**

Reset Button	Factory default
LED	System Status (per channel)

**Network**

Ethernet Port	Ethernet(10/100 Base-T), RJ-45 connector
Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP,FTP,SMTP,DNS,DDNS,NTP,ICMP,IGMP, ARP

**Software**

Web Browser	Microsoft Internet Explorer 6.0 or above
SDK	ACTi SDK-10000

PTZ Protocol*	Pelco-D, Pelco-P V1 and V2, Dynacolor, Sony VISCA, American Dynamics
---------------	--

Security	Password Protection: Configured by the Administrator
----------	--

**Operating**

Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
-------------	-------------------------------

**Power**

Power Requirement	AC 100 ~ 240V 50/60 Hz
Power Consumption	50 W

**Physical**

Dimensions (WxHxD)	444 mm x 44.5 mm x 272 mm (17.48" x 1.75" x 10.72")
Weight	3.9 Kg (8.60 lb)

**Approvals**

Certificate	CE, FCC
-------------	---------

\* These PTZ protocols are supported in ACTi NVR and Streaming Explorer.  
\*\* Adjust by inside jumper.